

Toll-Free: 855-326-1243 https://www.ferndalesafety.com

MODEL PS BANDSAW SAFETY GUARD

INSTALLATION GUIDE




Thank you for the purchase of our bandsaw safety guard PS. We have made this installation guide to help you set up and use this product. This guide assumes that you are familiar with drilling, tapping, and fabricating simple brackets. If you need any extra help, please call us at 855-326-1243.

Mounting and Installation

Tools required for installation (Not Included):

- Drill
- #7 or 13/64" drill bit
- 1/4-20 tap, tap wrench, and hex bolts
- Set of metric and SAE hex keys



- Wire strippers
- Utility knife
- Screwdrivers
- Hole saw or step drill
- Cable glands
- Cable connectors

Please make sure that you have everything included with your shipment. Remove all packing material from the mounting posts and screens. The screens will need to be mounted on the mounting posts during installation.


You should have:


- Two (2) screen assemblies with PVC curtains.
- Two (2) mounting posts with wiring.

Electrical Connection

Contact Rating: 3A @ 240VAC, 0.1A @ 240VDC

Wire Color Codes and Sample Wiring Diagram:






<u>IMPORTANT:</u> Do not connect the switch directly to the motor. The switch is not designed to handle motor loads. Wire the switch inside the control circuit only. If you require any help with this, please call us at 855-326-1243.



Visual Installation Tips

See the photo below for installation tips.

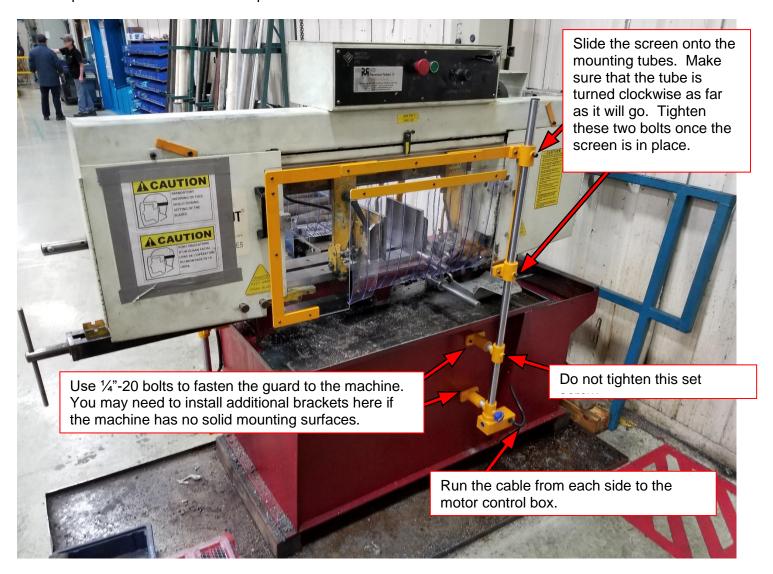

- Try to mount the screen as close to the blade as possible.
- Make sure that the screen is mounted in such a way so that material can be passed through easily.

3. Installation - Rear

The back of the machine has a similar installation setup as the front. Note that your machine will be different from the one pictured here.

